
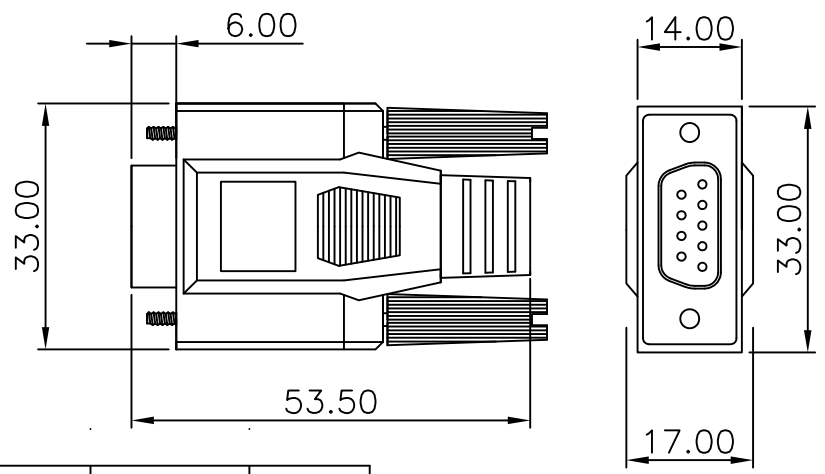


REV	DESCRIPTION	DATE
0	ISSUE	05/18/04

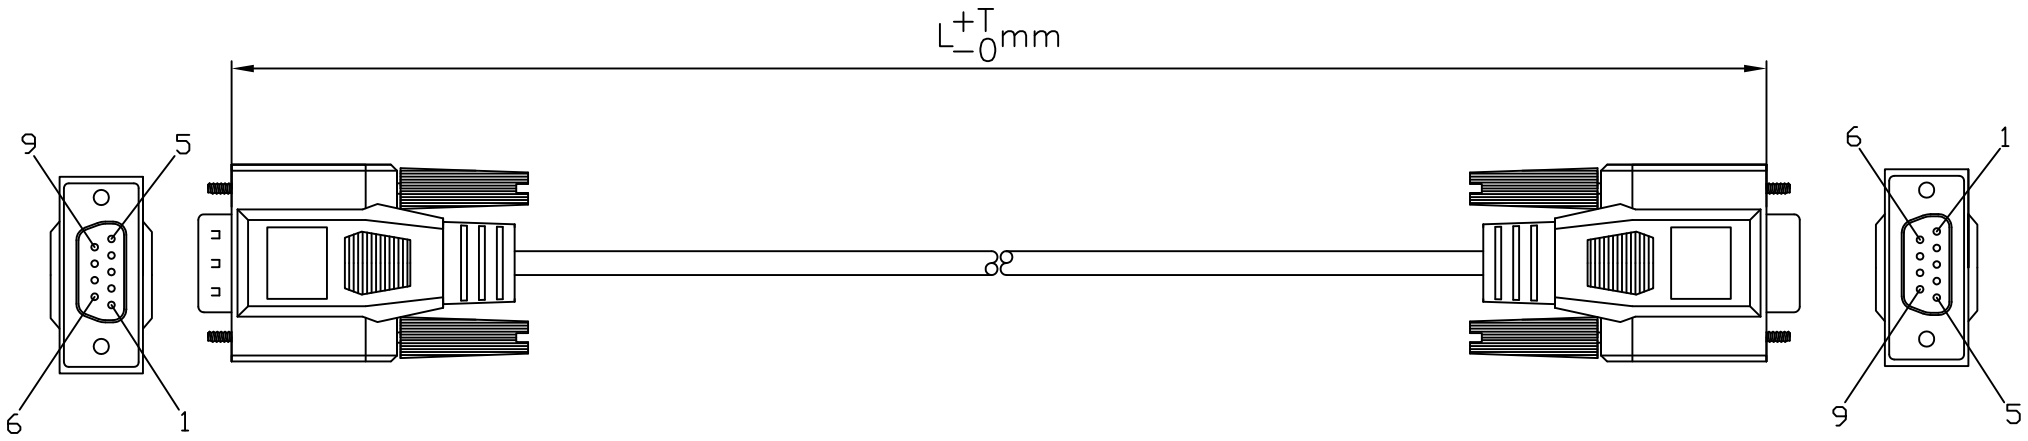

PIN OUT

DB9 M		DB9 F
1	BROWN	1
2	RED	2
3	ORANGE	3
4	YELLOW	4
5	GREEN	5
6	BLUE	6
7	VIOLET	7
8	GRAY	8
9	BLACK	9
SHELL	DRAIN	SHELL

E-DB9M-F-50	15240	75
E-DB9M-F-25	7620	50
E-DB9M-F-15	4572	40
E-DB9M-F-10	3048	30
E-DB9M-F-6	1829	30
E-DB9M-F-3	914	20
P/N.	L(mm)	T(mm)

Notes:  
 28 AWG 9/C Overall shielded cable  
 AWM rated  
 RoHS Compliant

LIBERTY AV SOLUTIONS		WWW.LIBAV.COM
11675 RIDGELINE DRIVE		(800) 530-8998
COLORADO SPRINGS, CO 80921		
UNIT: mm	TITLE: Assembly Specification CBL, ASY, CNT, DB9	
SCALE: None	PART NUMBER: E-DB9M-F-XX	DR. RP
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±.015 xx ±.010 xxx ±.005 ANGLE ± 1°		CH. RP
SHEET 1/1	DWG. #: LWC-ASY-00124	AP. RP