




REV	DESCRIPTION	DATE
0	ISSUE	05/26/06

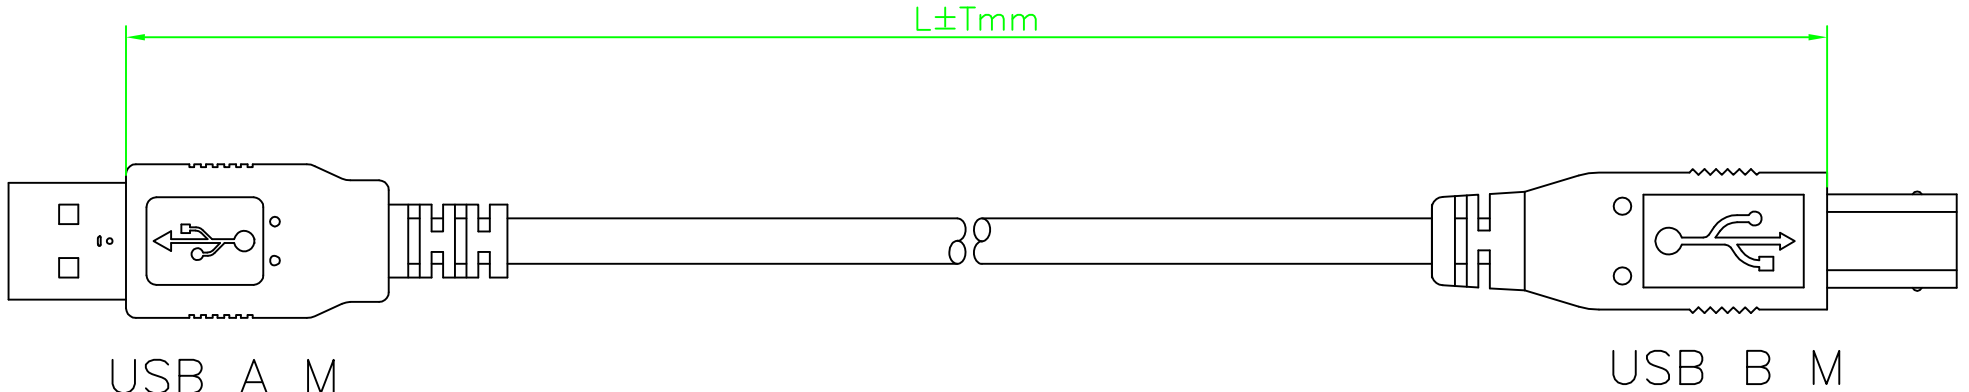

PIN OUT	
USB A M	USB B M
1	1
2	2
3	3
4	4
SHELL	SHELL

NOTE:
 Bulk Cable 28 AWG Data, 26 AWG power
 Connectors Gold Plate 30µ
 UL AWM Style 20276 30V 80°C
 OR UL AWM Style 2725
 USB 2.0
 RoHS Compliant

E-USBAB-15	4572	50
E-USBAB-10	3048	30
E-USBAB-6	1829	20
E-USBAB-3	915	20
P/N.	L(mm)	T(mm)

LIBERTY AV SOLUTIONS WWW.LIBAV.COM
 11675 RIDGELINE DRIVE (800) 530-8998
 COLORADO SPRINGS, CO 80921

	UNIT:mm	TITLE: Assembly Specification CBL, ASY, USB	
SCALE	None		
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±.015 xx ±.010 xxx ±.005 ANGLE ± 1°	PART NUMBER:	DR.	RP
	E-USBAB-XX	CH.	RP
SHEET 1/1	DWG. #:	AP.	RP
	LWC-ASY-00081		