


IPEXAR-UIC Hardware Controller Specifications

The Liberty AV IPEXAR-UIC Arranger UI Creator controller is a purpose built Linux server appliance provisioned specifically for controlling and managing TCP/IP endpoints on a Network. It is designed with an auto on feature so device powers immediately when power is applied or cycled so server application is always running. The IPEXAR-UIC requires a hardwired Ethernet connection to a local area network. The default IP address for the IPEXAR-UIC is 169.254.1.1/16. The Arranger Controller API can be accessed via TCP requests on port 6980.

The IPEXAR-UIC is licensed to control up to 3 IP enabled devices on the Network. To add on more device support, add on the AGR-UI-1 Arranger license sku that gives you an additional 3 IP devices to control.

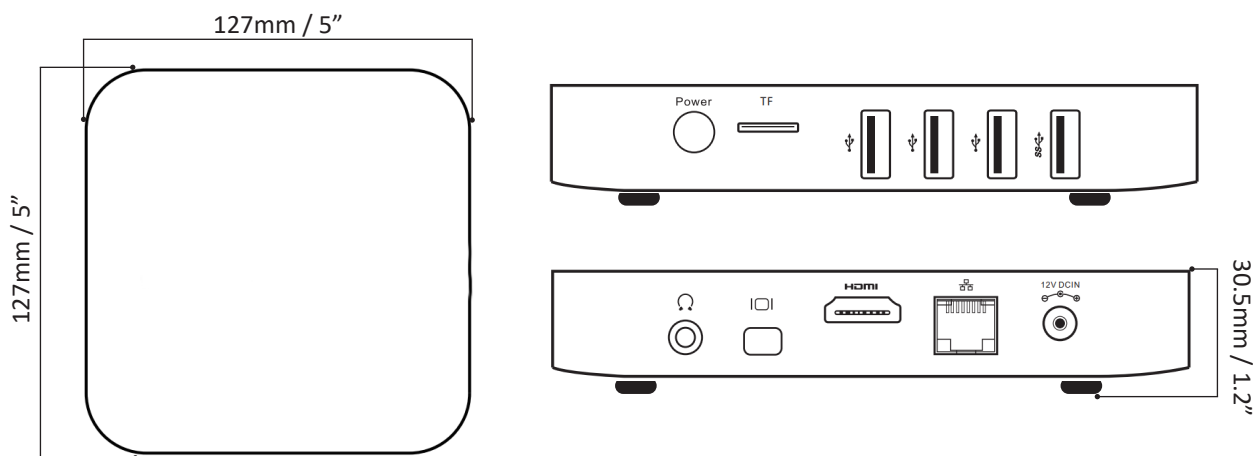

Processor	Intel X5-Z8350 64 bit
GPU	Intel HD Graphics
Memory	4GB DDR3L
Internal Storage	64GB eMMC 5.1
Operating System	Debian 10
Video Output	HDMI 1.4 , Mini Display Port
3.5mm Input	Not applied or used in OS
Peripheral Interface	RJ-45 Gigabit Ethernet, Micro SD Card Reader USB2. port x3, USB 3.1 port x1, Kensington lock ready
Power	DC 12V, 3A adapter with EU and US power adapters (CE, FCC certified)
Dimensions	5" x 5" x 0.75" Height (1.2" includes Rubber feet)
Weight	0.95 lbs
Included Accessories	HDMI Cable, PC wall mount
Warranty	1 Year